



Flytrap Commercial™ IP65

Incorporating high specification components and build quality, Flytrap Commercial™ IP65 is available as a 30, 40 or 80W unit and can be ceiling suspended, slimline wall or discreet wall mounted. Flytrap Commercial™ IP65 is suitable for use in harsh environments which may require hosing down.

FEATURES

Choice of ceiling suspended, slimline wall or discreet wall mounting

All stainless steel construction certified to IP65


FEP coated shatterproof tubes for hazardous and sensitive areas

High efficacy UV tubes

Designed for use with GLUPAC® pheromone impregnated glueboards with UV stabiliser

Robust all metal construction


Independently tested and certified to RoHS and relevant European standards

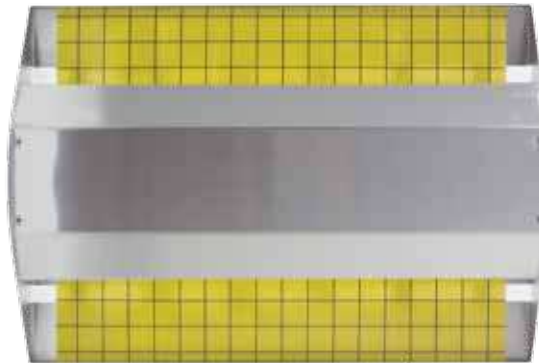

PRODUCT CODE	ZF021
DESCRIPTION	FTC30 IP65, 30 watt
DIMENSIONS (MM) H x W x D	160 x 475 x 355
COVERAGE (M ²)	80
TUBES	2 x TP15-18S
GLUEBOARDS	1 x INF060
WEIGHT (KG)	4.0

PRODUCT CODE	ZF022
DESCRIPTION	FTC40 IP65, 40 watt
DIMENSIONS (MM) H x W x D	160 x 650 x 355
COVERAGE (M ²)	120
TUBES	2 x TP20-24S
GLUEBOARDS	1 x INF061
WEIGHT (KG)	5.0

PRODUCT CODE	ZF023
DESCRIPTION	FTC80 IP65, 80 watt
DIMENSIONS (MM) H x W x D	160 x 650 x 355
COVERAGE (M ²)	240
TUBES	2 x TP40-24S
GLUEBOARDS	1 x INF061
WEIGHT (KG)	5.0

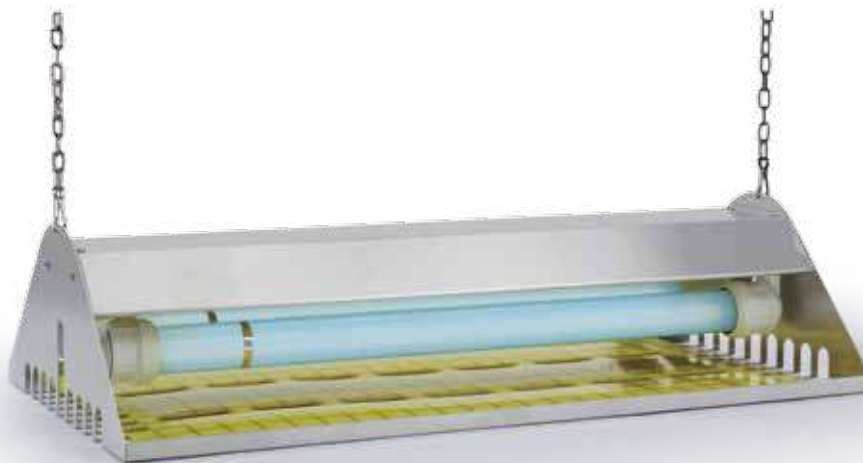

ROOM COVERAGE

80 – 240 m²

APPLICATION

Commercial Back-room + Industrial Food Preparation + Specialist